


700

SPRING REWIND REELS

To handle 1/4" through 1/2" I.D. hose.

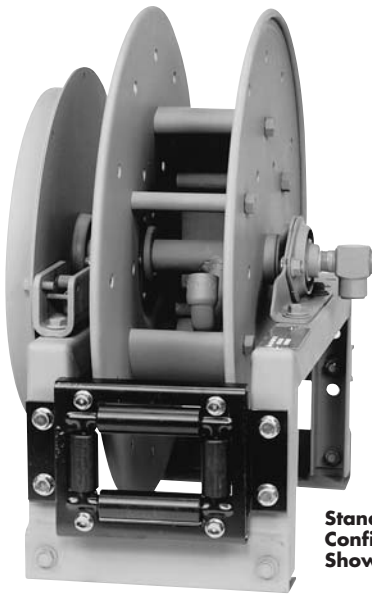

Standard Configuration Shown

- Rollformed channel frame for heavy-duty applications.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet 90° balanced pressure swivel joint 1/2" female NPT threads.
- Standard outlet 1/2" female NPT threads.
- Standard Pressures to 3000 psi (207 bar) (available up to 10,000).
- Temperatures from -60° F to +250° F (-51° C to +121° C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.

For:

- Lubrication
- Air/Water
- Assembly Operations
- Washdown
- Air Tools
- General Industrial Applications

Model Number	Hose Capacity of Reel			Approx. Weight		Standard Roller Assy	Reel Dimensions***									
	feet			lb.	Frt. SHIP		inches									
	I.D. (in)	3/8"	1/2"				mm.									
	I.D. (mm)	10	13	NET	Wt.	A	B	C	D	E	F	G	H	X	Y	
716-25-26-15.5B		75	75	90	125	R204	9.25	4	15.5	25	26.12	12.75	25.88	13.5	4.5	22
		23	23	41	57		235	102	394	635	663	324	657	343	114	559
718-25-26-15.5G		100	100	96	131	R206	11.25	6	15.5	25	26.12	14.75	25.88	13.5	6.5	22
		30	30	44	59		286	152	394	635	663	375	657	343	165	559
718-30-31-20D		150	125	112	147	R206	11.25	6	20	28.5	29.62	15.5	31.38	17	6.5	25.5
		46	38	51	67		286	152	508	724	752	394	797	432	165	648

Notes:

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. For a detailed parts breakdown drawing, request ISO 66.
5. **Finish:** refer to Page 4.
6. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2

