

# 700

## SPRING REWIND REELS

To handle 1/4" through 1/2" I.D. hose.

- Rollformed channel frame for heavy-duty applications.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet 90° balanced pressure swivel joint 1/2" female NPT threads.
- Standard outlet 1/2" female NPT threads.
- Standard Pressures to 3000 psi (207 bar) (available up to 10,000 psi 690 bar).
- Temperatures from -60° F to +250° F (-51° C to +121° C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.

**For:**

- Lubrication
- Washdown
- Air/Water
- Air Tools
- Assembly Operations
- General Industrial Applications

**Parts Drawing – ISO 66**

Model Number	Hose Capacity of Reel feet m.			Approx. Weight lb. kg.			Standard Roller Assy	Reel Dimensions*** inches mm.									
	I.D. (in)	3/8"	1/2"	NET	UPS/FedEx SHIP Wt.	Freight SHIP Wt.		A	B	C	D	E	F	G	H	X	Y
	I.D. (mm)	10	13														
716-23-24-15.5J	65 20	65 20	79 36	86* 39	114 52	R204	9.25 235	4 102	15.5 394	23.25 591	24.38 619	12.75 324	23.88 607	12.5 318	4.5 114	20 508	
716-23-24-15.5G	75 23	65 20	94 43	102* 46	129 59	R204	9.25 235	4 102	15.5 394	23.25 591	24.38 619	12.75 324	23.88 607	12.5 318	4.5 114	20 508	
716-25-26-15.5B	75 23	75 23	90 41	– 57	125 59	R204	9.25 235	4 102	15.5 394	25 635	26.12 663	12.75 324	25.88 657	13.5 343	4.5 114	21.75 552	
718-25-26-15.5G	100 30	100 30	96 44	– 59	131 59	R206	11.25 286	6 152	15.5 394	25 635	26.12 663	14.75 375	25.88 657	13.5 343	6.5 165	21.75 552	
718-30-31-20D	150 46	125 38	127 58	– –	162 73	R206	11.25 286	6 152	20 508	28.5 724	29.62 752	15.5 394	31.38 797	17 432	6.5 165	25.25 641	

**Notes:** A hose stop is necessary on hose to keep spring from unwinding.


1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** refer to Page 4.

**5. Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* x,y indicate mounting holes. See page 2

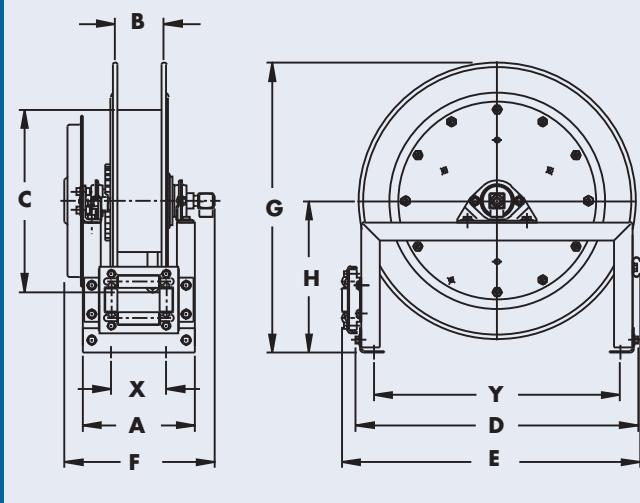

Available Roller Positions