


7000

MANUAL OR POWER REWIND REELS

To handle dual 3/4" or 1" I.D. hose.

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
- Choose gear-driven crank rewind or chain & sprocket drive powered by an electric, hydraulic or compressed air motor. An auxiliary rewind is standard.
- Crank rewind and power rewind reels, pinion brake standard.
- Standard inlets 90° ball bearing swivel joints 1" female NPT threads.
- Standard outlets 1" female NPT threads.
- Standard inlet, outlet riser and hub assembly are steel. Optional bronze or aluminum swivel joint and stainless steel hub assembly and riser, are available.
- Pressures to 1000 psi (69 bar).
- Temperatures from -60° F to +250° F (-51° C to +121° C).
- Consult factory for other pressures & temps.

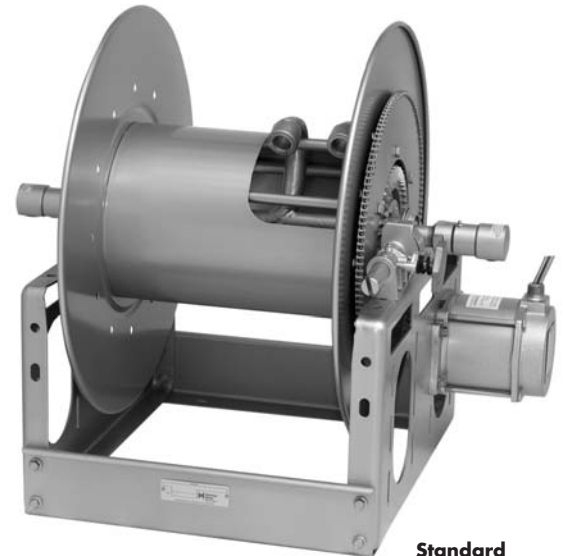

Standard Configuration Shown

For:
 • Hydraulics
 • Dual Agents

Model Number	Hose Capacity of Reel			Approx. Weight		Reel Dimensions***									
	I.D. (in) I.D. (mm)	3/4" 19	1" 25	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
For Power Rewind See Note 5	O.D. (in) O.D. (mm)	1-9/32" 33	1-9/16" 40												
7024-19-21	2/60 2/18	2/25 2/8	100 45	142 64	21 533	15.5 394	20.5 521	21.88 556	29.75 756	32.12 816	21.5 546	12.12 308	13 330	16.75 425	
7026-23-24	2/90 2/27	2/50 2/15	105 48	147 67	23 584	17.5 445	20.5 521	23 584	31.75 806	34.12 867	23.5 597	12.12 308	15 381	16.75 425	
7016-25-26	2/40 2/12	2/30 2/9	95 43	145 66	13 330	7.5 191	25.5 648	24.75 629	21.75 552	24.12 613	27.88 708	15.5 394	7.75 197	21.75 552	
7032-25-26	2/175 2/53	2/100 2/31	129 59	179 81	29.5 749	24 610	25.5 648	24.75 629	38.25 972	40.62 1032	27.88 708	15.5 394	21.5 546	21.75 552	
† 7032-30-31	2/300 2/91	2/150 2/46	137 62	187 85	29.5 749	24 610	25.5 648	28.75 730	38.25 972	40.62 1032	29.88 759	15.5 394	21.5 546	21.75 552	
† 7024-33-34	2/225 2/69	2/115 2/35	120 54	170 77	20.5 521	15.5 394	31.5 800	31.75 806	29.75 756	32.12 816	33.62 854	17.75 451	13 330	27.75 705	
† 7032-33-34	2/350 2/107	2/200 2/61	137 62	187 85	29 737	24 610	31.5 800	31.75 806	38.25 972	40.62 1032	33.62 854	17.75 451	21.5 546	27.75 705	


Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
3. Dimensions shown up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
4. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)	Ship (lbs.)	Net (kg.)	Ship (kg.)
Electric	40	40	18.1	18.1
Hydraulic	20	20	9.1	9.1
Air	20	20	9.1	9.1

5. When ordering, prefix model number with:
 A = Air Rewind EP = Electric Rewind
 MX = Chain Drive Crank HD = Hydraulic Rewind
 (Air rewind reels are supplied with control valve and hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
6. For a detailed parts breakdown drawing, request ISO 72.
7. **Finish:** refer to Page 4.

8. Be sure to check dimensions and weights prior to ordering.

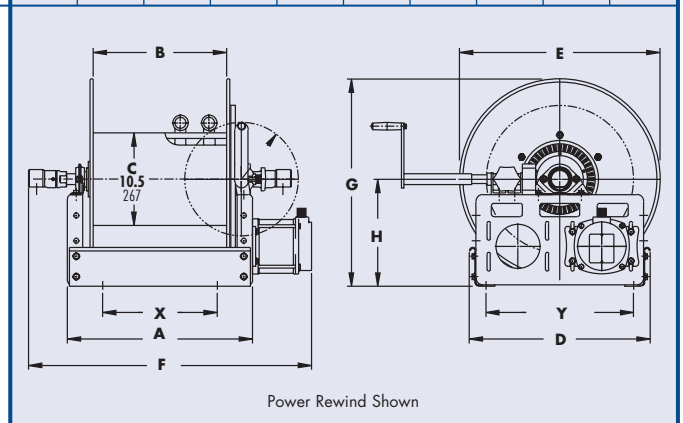

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2
 † Some applications require a clutch/reduction unit.