


7500

MANUAL OR POWER REWIND REELS

To handle single 1" through 1-1/2" I.D. hose.

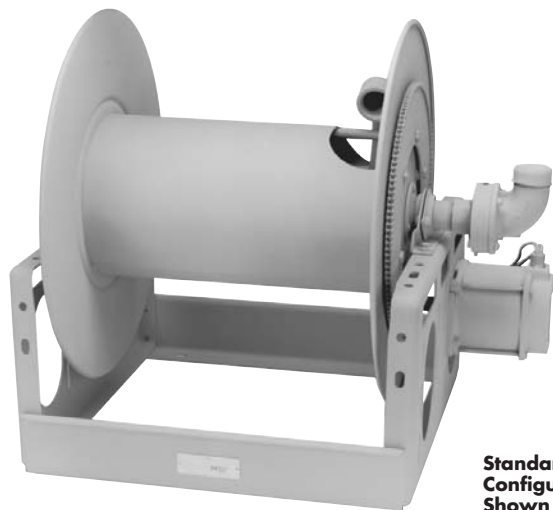

Standard Configuration Shown



For:

- Fuel Dispensing (Consult Factory)
- Bulk Transfer
- Suction/Discharge (Consult Factory)

Optional Auxiliary Rewind (Ring and pinion shaft rewind unit with removable crank handle)

- Heavy-duty reel designed for longer lengths.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake and power rewind reels with a comet brake.
- Standard inlet 90° ball bearing swivel joint 1-1/2" female NPT threads and 2" victaulic groove.
- Standard outlet flanged riser 1-1/2" female NPT threads.
- Standard inlet, outlet riser and hub assembly are steel. Optional bronze or aluminum swivel joint and stainless steel hub assembly and riser, are available.
- Rollers may be purchased as accessory items.
- Operate at pressures to 600 psi (41 bar).
- Temperatures from -40° F to +175° F (-40° C to +79° C).
- Consult factory for other pressures & temps.

Model Number	Hose Capacity of Reel				Approx. Weight		Reel Dimensions***										
	I.D. (in) I.D. (mm)	1" 25	1-1/4" 32	1-1/2" 38	lb. kg.		inches mm.										
For Power Rewind See Note 5	I.D. (in)	1-9/16"	1-13/16"	2-1/16"	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y	
	O.D. (in) O.D. (mm)	40	46	52													
7528-19-21	85 26	70 21	50 15	104 47	146 66	25.5 648	20 508	20.5 521	18.75 476	32 813	33 838	21.5 546	12.12 308	17.5 445	16.75 425		
7538-23-24	200 61	190 58	100 30	130 59	172 78	35 889	29.5 749	20.5 521	22.75 578	41.5 1054	42.5 1080	23.5 597	12.12 308	27 686	16.75 425		
7520-25-26	115 35	75 23	50 15	106 48	148 67	17 432	11.5 292	25.5 648	24.75 629	23.5 597	24.5 622	27.88 708	15.5 394	9 229	21.75 552		
7528-25-26	200 61	135 41	100 30	123 56	165 75	25.5 648	20 508	25.5 648	24.75 629	32 813	33 838	27.88 708	15.5 394	17.5 445	21.75 552		
7522-30-31	190 58	160 49	100 30	118 54	168 76	19 483	13.5 343	25.5 648	28.75 730	25.5 648	26.5 673	29.88 759	15.5 394	11 279	21.75 552		
† 7528-30-31	285 87	260 79	160 49	131 59	181 82	25.5 648	20 508	25.5 648	28.75 730	32 813	33 838	29.88 759	15.5 394	17.5 445	21.75 552		
† 7526-33-34	335 102	200 61	200 61	133 60	183 83	22.5 572	17.5 445	31.5 800	31.75 806	29.25 743	30.25 768	33.62 854	17.75 451	15 381	27.75 705		


Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)	Ship (lbs.)	Net (kg.)	Ship (kg.)
Electric	40	40	18.1	18.1
Hydraulic	20	20	9.1	9.1
Air	20	20	9.1	9.1
- When ordering power rewind models, prefix model number with:
 - A = Air Rewind
 - EP = Electric Rewind (1/2 hp)
 - HD = Hydraulic Rewind
 (Air rewind reels are supplied with control valve and hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
- For a detailed parts breakdown drawing, request ISO 18.
- Finish:** refer to Page 4.
- Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2
 † Some applications require a clutch/reduction unit.

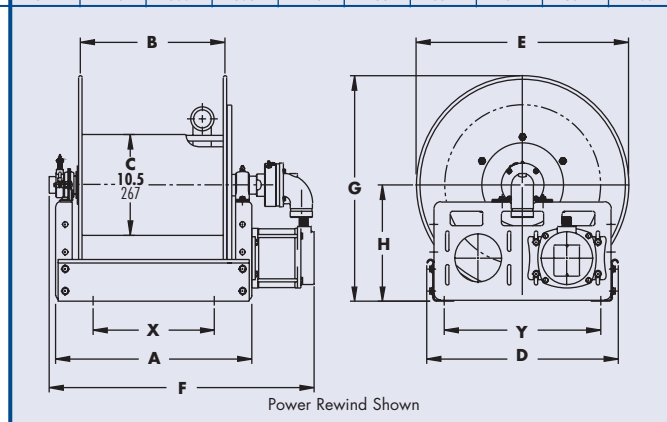

Power Rewind Shown