

9000

MANUAL OR POWER REWIND REELS

To handle 2" through 3" I.D. hose.

- Heavy-duty reel designed for longer lengths and larger diameters of hose through 3" I.D.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with a pinion brake power rewind reels with a comet brake.
- Standard inlet 90° ball bearing swivel joint 3" female NPT threads.
- Standard outlet flanged riser 3" female NPT threads.
- Standard, outlet riser and hub assembly are aluminum with ductile inlet. Optional bronze or aluminum swivel joint and stainless steel hub assembly and riser, are available.
- Rollers may be purchased as accessory items.
- Pressures to 300 psi (21 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures & temps.




Shown with Optional
Auxiliary Rewind

For:

- Suction/Discharge
(consult factory)
- High Volume
Application
- Bulk Transfer
- Chemical Transfer

• **Fueling Applications**

Refer to:
Aviation Catalog
H-0418-AVIA
Petroleum Catalog
H-0417-FD

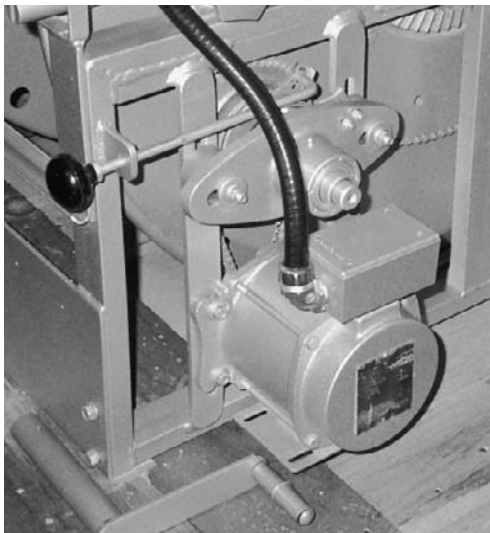

For use on reels with 39" diameter or larger discs and/or when increased torque and slower rewind speeds are required. Factory-installed when specified or available as an accessory item.

Chain Clutch-Reduction Units

9000

Model Number	Hose Capacity of Reel feet m.				Approx. Weight Crank Rewind ³ lb. kg.		Reel Dimensions** inches mm.									
	I.D. (in) I.D. (mm)	2" 51	2-1/2" 64	3" 76	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
	O.D. (in) O.D. (mm)	2-9/16" 65	3-3/16" 81	3-3/4" 95												
9332-33-34		70	30	25	147	217	23.75	17.5	31.75	31.75	33.75	33.25	33.88	18	16.25	27.75
		21	9	8	67	98	603	445	807	807	857	845	861	457	413	705
9338-33-34		100	45	35	187	257	30.25	24	31.75	31.75	40.25	39.75	33.88	18	22.75	27.75
		30	14	11	85	117	768	610	807	807	1022	1010	861	457	578	705
9346-33-34		140	60	50	237	372	38.25	32	31.75	31.75	48.25	47.75	33.88	18	30.75	27.75
		43	18	15	108	169	972	813	807	807	1226	1213	861	457	781	705
9338-39-40		185	90	80	239	480	30.25	24	40	39	40.25	39.75	40.38	20.88	22.75	37
		56	27	24	108	218	768	610	1016	991	1022	1010	1026	530	578	940
9334-45-46		200	130	115	361	525	26.25	20	46	45	36.25	35.75	46.38	23.88	18.75	43
		61	40	35	164	239	667	508	1168	1143	921	908	1178	607	476	1092

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)	Ship (lbs.)	Net (kg.)	Ship (kg.)
Electric	40	40	18.1	18.1
Hydraulic	20	20	9.1	9.1
Air	20	20	9.1	9.1

- When ordering power rewind models, prefix model number with:
A = Air Rewind EP = Electric Rewind (1/2 HP)
HD = Hydraulic Rewind
(Air rewind reels are supplied with control valve and hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)

5. For a detailed parts breakdown drawing, request ISO 57.

6. **Finish:** refer to Page 4.

7. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2

