


G2000

MANUAL REWIND REELS

To handle dual 1/4" through 1/2" I.D. hose.

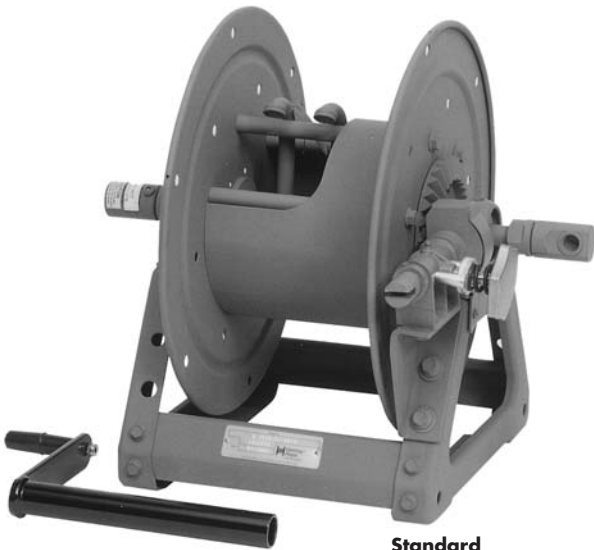

Standard Gear Driven Crank Rewind Shown

For:

- Hydraulics
- Air/Water

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
- Gear-drive crank rewind.
- Pinion brake as standard.
- Standard inlets 90° ball bearing swivel joints 1/2" female NPT threads.
- Standard outlets 1/2" female NPT threads.
- Pressures to 3000 psi (207 bar).
- Temperatures from +20° F to +400° F (-7° C to +204° C).
- Consult factory for other pressures & temps.
- For power rewind see Series 2000, pg. 16.
- Reels for use with oxygen/acetylene. (See Welding Catalog H-0408-W).

Model Number	Hose Capacity of Reel				Approx. Weight		Reel Dimensions***			
	feet				lb.		inches			
	m.				kg.		mm.			
I.D. (in) I.D. (mm)	1/4" 6	3/8" 10	1/2" 13	NET	SHIP	A	B	F	X	
O.D. (in) O.D. (mm)	5/8" 16	3/4" 19	7/8" 22							
G2016-17-18-8	2/75 2/23	2/50 2/15	2/35 2/11	40 15	50* 23	13 330	8 203	21 533	11.5 292	
G2020-17-18-8	2/150 2/46	2/100 2/31	2/50 2/15	42 18	50* 23	17 432	12 305	25 635	15.5 394	
G2026-17-18-8	2/200 2/61	2/150 2/46	2/100 2/31	44 19	50* 23	23 584	18 457	31 787	21.5 546	

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. For a detailed parts breakdown drawing, request ISO 205.
4. **Finish:** refer to Page 4.
5. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

* When shipped as a parcel package (via Fed-Ex or UPS Ground).

*** x,y indicate mounting holes. See page 2

