


G4100

MANUAL OR POWER REWIND REELS

To handle single 3/4" or 1" I.D. hose.

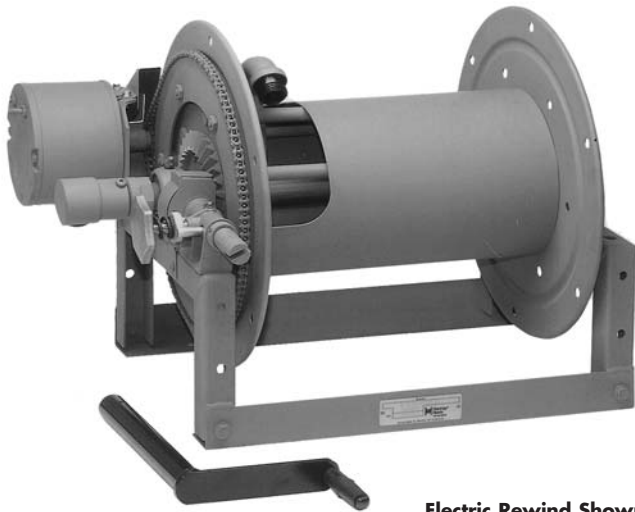

Electric Rewind Shown with Optional Gear Driven Crank Rewind

For:

- Fuel Dispensing (Consult Factory)
- Fire Protection
- Water Supply
- Chemical Transfer

- Lightweight compact reels designed for long lengths of hose in manual and power rewind.
- Gear driven crank rewind handle is removable.
- Chain and sprocket drive powered by electric, hydraulic, or compressed air motor.
- Gear driven crank rewind, adjustable pinion brake, spring actuated pin lock.
- Standard inlet 90° ball bearing swivel joint 1" female NPT threads.
- Standard outlet 1" female NPT threads.
- Optional Rollers: Specify roller position when ordering.
- Pressures to 1000 psi (69 bar).
- Temperatures from -60° F to +250° F (-51° C to +121° C).
- Consult factory for other pressures & temps.

Model Number	Hose Capacity of Reel			Approx. Weight Crank Rewind ³		Reel Dimensions ^{***}					
	I.D. (in) I.D. (mm)	3/4" 19	1" 25	NET	SHIP	A	B	E CRANK	E POWER	F	X
For Power Rewind See Note 5	O.D. (in) O.D. (mm)	1-9/32" 33	1-9/16" 40								
G4118-17-18		50 15	35 11	62 28	97 44	15 381	10 254	18 457	20.5 521	20.5 521	7.5 190
G4124-17-18		100 30	50 15	72 33	107 49	21 533	16 406	18 457	20.5 521	26.5 673	13.5 343
G4130-17-18		150 46	75 23	83 38	118 54	27 686	22 559	18 457	20.5 521	32.5 826	19.5 495
G4138-17-18		200 61	100 30	96 44	131 59	35 889	30 762	18 457	20.5 521	40.5 1029	27.5 698

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)	Ship (lbs.)	Net (kg.)	Ship (kg.)
Electric	18	18	8.2	8.2
Hydraulic	15	15	6.8	6.8
Air	15	15	6.8	6.8
4. Dimension "F" is the overall length of standard model reels.
5. When ordering power rewind models, prefix model number with:
 - A = Air Rewind E = Electric Rewind HD = Hydraulic Rewind
 (Air rewind reels are supplied with control valve and hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
6. For a detailed parts breakdown drawing, request ISO 206.
7. **Finish:** refer to Page 4.
8. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes. See page 2

