


# N500

## HIGH PRESSURE SPRING REWIND REELS

To handle single 1/4" or 3/8" I.D. hose.

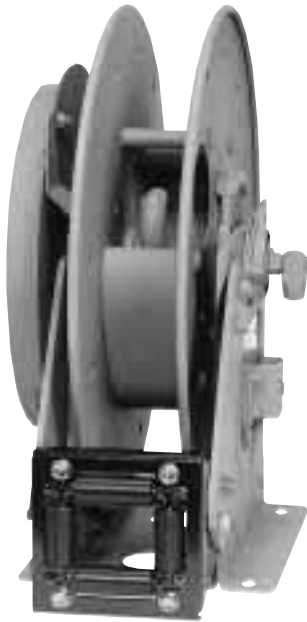

Standard Configuration Shown

**For:**

- Chassis Grease
- Hydraulics
- Air/Water

- Compact frame and narrow base.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet 90° swivel joint 1/4" female NPT threads. 3/8" female NPT threads are optional and **must be specified**.
- Standard outlet is 1/4" female NPT threads. 3/8" female NPT threads are optional and **must be specified**.
- Other threads can be furnished and **must be specified**.
- Standard pressure of 10,000 psi (689 bar), product temperatures from -40° F to +250° F (-40° C to +121° C). Optional 1/4" 3000 psi (207 bar), or 3/8" 3000 psi (207 bar) or 8000 psi (552 bar) are available upon request.
- 4-way roller assembly.
- Constant Tension is available – consult factory.

Model Number	Hose Capacity of Reel			Approx. Weight		Standard Roller Assy	Reel Dimensions***		
	I.D. (in) I.D. (mm)	1/4" 6	3/8" 10	lb. kg.	Fr. SHIP Wt.		inches mm.		
	O.D. (in) O.D. (mm)	5/8" 16	3/4" 19	NET			C	E	G
N515-14-16-8C		25 8	25 8	48* 22	83 38	N203	8 203	17.62 448	16.25 413
N515-16-17C		35 11	35 11	51* 23	86 39	N203	10.5 267	18.5 470	17 432
N515-19-20J		50 15	50 15	63* 29	98 44	N203	10.5 267	20.75 527	20 508
N515-23-24J		75 23	75 23	75* 34	110 50	N203	15.5 394	23.75 603	24 610

**Notes:**

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. For a detailed parts breakdown drawing, request ISO 92.
5. **Finish:** refer to Page 4.
6. **Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

\* When shipped as a parcel package (via Fed-Ex or UPS Ground), Net wt. plus carton wt.

\*\*\* x,y indicate mounting holes. See page 2

